

STEMPLE PILOTY SZYBKOWYMIENNE DO WYSOKICH OBCIĄŻEŃ

BALL LOCK HEAVY DUTY PILOTS

MBHA MBHP

Materiał / Material


HSS - M2

Twardość / Hardness


60 - 62 HRC



MBHA

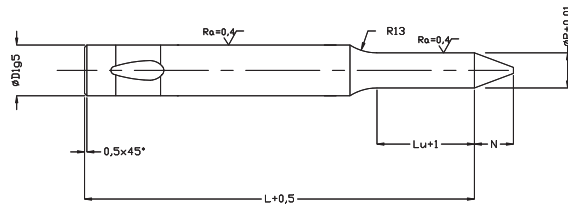

MBHP

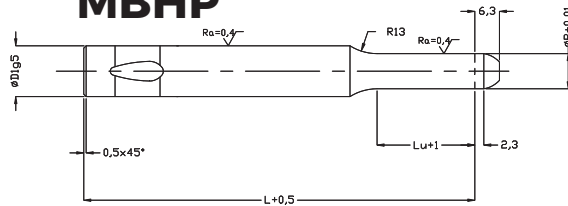

MBHA										
D1	Lu	N	ZAKRES RANGE P	DŁUGOŚĆ CAŁKOWITA OVERALL LENGTH L						
				63	71	80	90	100	110	125
10.0	13/19/25	10.0	4,9 - 9,99	X	X	X	X	X	X	
13.0	13/19/25	12.0	5,9 - 12,99	X	X	X	X	X	X	X
16.0	13/19/25	17.0	9,9 - 15,99	X	X	X	X	X	X	X
20.0	13/19/25	22.0	12,9 - 19,99	X	X	X	X	X	X	X
25.0	13/19/25	25.0	16,9 - 24,99		X	X	X	X	X	X
32.0	13/19/25	25.0	19,9 - 31,99		X	X	X	X	X	X
40.0	13/19/25	30.0	24,9 - 39,99		X	X	X	X	X	X

MBHP										
D1	Lu	ZAKRES RANGE P	DŁUGOŚĆ CAŁKOWITA OVERALL LENGTH L							
			56	63	71	80	90	100	110	
10.0	13/19/25	3,9 - 9,99	X	X	X	X	X	X	X	X
13.0	13/19/25	4,9 - 12,99	X	X	X	X	X	X	X	X
16.0	13/19/25	7,9 - 15,99	X	X	X	X	X	X	X	X
20.0	13/19/25	11,9 - 19,99	X	X	X	X	X	X	X	X
25.0	13/19/25	14,9 - 24,99		X	X	X	X	X	X	X
32.0	13/19/25	19,9 - 31,99		X	X	X	X	X	X	X
40.0	13/19/25	24,9 - 39,99		X	X	X	X	X	X	X

Zmiany w wymiarach standardowych dostępne na stronie 239
For standard alterations see pages 239
Powłoki oraz dodatkowa obróbka cieplna SHT dostępne na stronie 254
For surface treatments and coatings see page 254

Jak zamówić / How to order

