

SŁUPY PROWADZĄCE

DEMOUNTABLE GUIDE PILLARS

WDX 13-65

WDX

Materiał / Material

1.7131

Twardość / Hardness


58 ± 62 HRC

Jak zamówić / How to order

Symbol: **WDX50200**

Inne wymiary na żądanie
Other dimensions on demand

Zaczepy i śruby str. 285
Retaining clamps and screws page 285

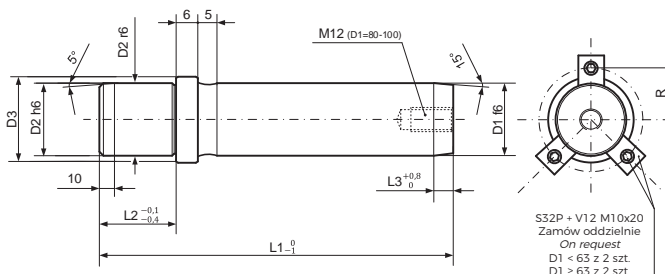

| Symbol | D1 | L1 | D2 | D3 | R | L2 | L3 |
|-----------|-----|-----|-----|-----|------|-----|----|
| WDX25125 | 25 | 125 | 25 | 33 | 34 | 40 | 4 |
| WDX25140 | | 140 | | | | | |
| WDX25160 | | 160 | | | | | |
| WDX25180 | | 180 | | | | | |
| WDX25200 | | 200 | | | | | |
| WDX25224 | 224 | | | | | | |
| WDX32140 | 32 | 140 | 32 | 40 | 37,5 | 45 | 8 |
| WDX32160 | | 160 | | | | | |
| WDX32180 | | 180 | | | | | |
| WDX32200 | | 200 | | | | | |
| WDX32224 | | 224 | | | | | |
| WDX32250 | 250 | | | | | | |
| WDX40160 | 40 | 160 | 40 | 50 | 41,5 | 56 | 8 |
| WDX40180 | | 180 | | | | | |
| WDX40200 | | 200 | | | | | |
| WDX40224 | | 224 | | | | | |
| WDX40250 | | 250 | | | | | |
| WDX40280 | 280 | | | | | | |
| WDX50160 | 50 | 160 | 50 | 60 | 46,5 | 70 | 10 |
| WDX50180 | | 180 | | | | | |
| WDX50200 | | 200 | | | | | |
| WDX50224 | | 224 | | | | | |
| WDX50250 | | 250 | | | | | |
| WDX50280 | 280 | | | | | | |
| WDX50315 | 315 | | | | | | |
| WDX63200 | 63 | 200 | 63 | 80 | 53 | 80 | 10 |
| WDX63224 | | 224 | | | | | |
| WDX63250 | | 250 | | | | | |
| WDX63280 | | 280 | | | | | |
| WDX63315 | | 315 | | | | | |
| WDX63355 | 355 | | | | | | |
| WDX63400 | 400 | | | | | | |
| WDX80224 | 80 | 224 | 80 | 90 | 61,5 | 100 | 10 |
| WDX80250 | | 250 | | | | | |
| WDX80280 | | 280 | | | | | |
| WDX80315 | | 315 | | | | | |
| WDX80355 | | 355 | | | | | |
| WDX80400 | 400 | | | | | | |
| WDX80500 | 500 | | | | | | |
| WDX100280 | 100 | 280 | 100 | 110 | 71,5 | 125 | 10 |
| WDX100315 | | 315 | | | | | |
| WDX100355 | | 355 | | | | | |
| WDX100400 | | 400 | | | | | |
| WDX100500 | | 500 | | | | | |

Elementy prowadzące do tłoczników